A10SKHA2 | Released by HIWIN design group.

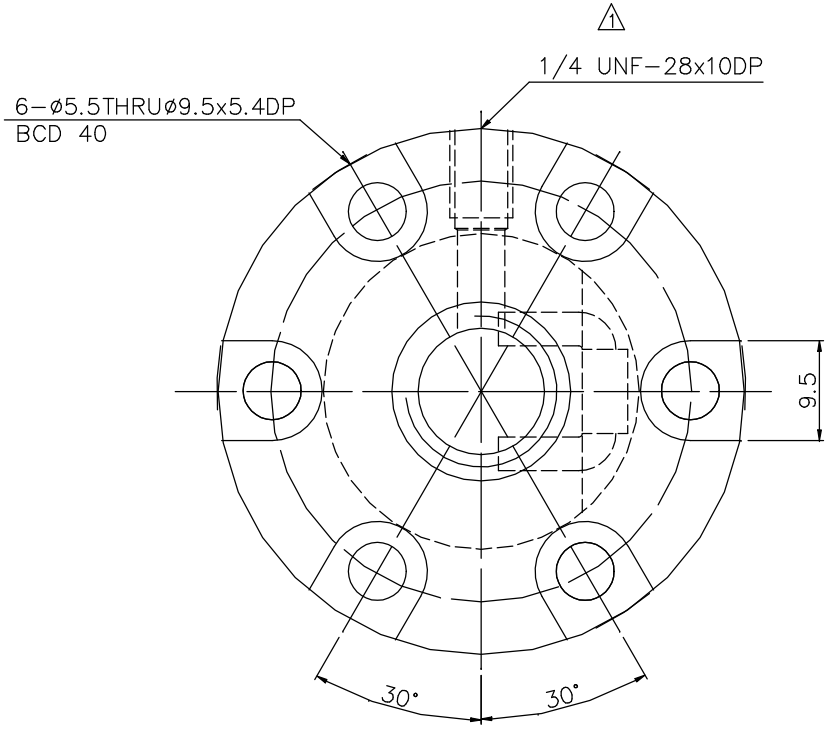

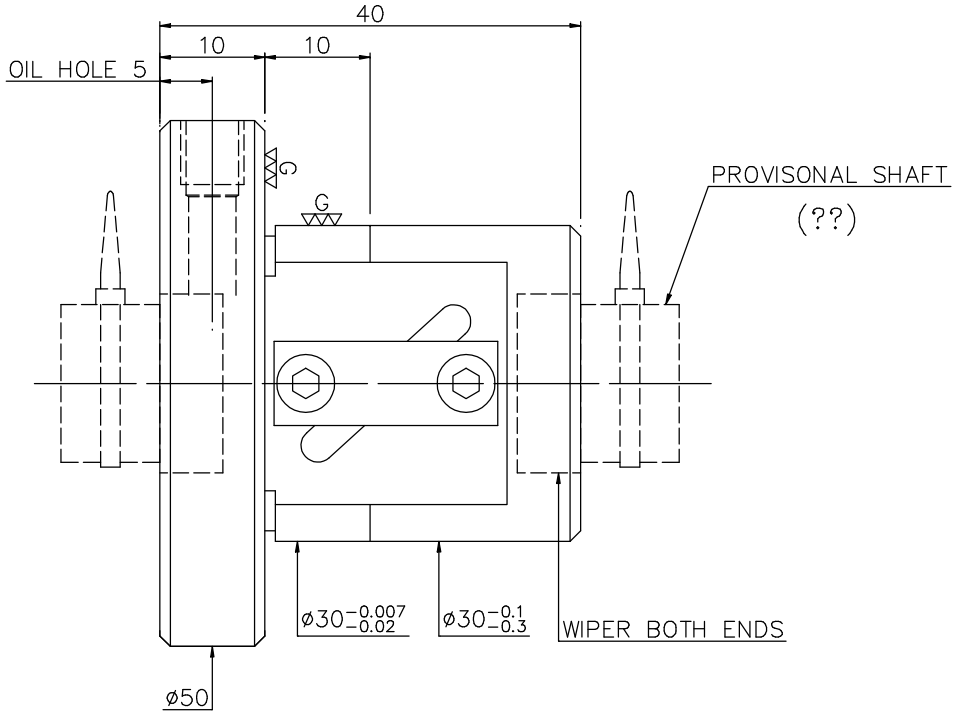

NOTE: ?? A10SL0???

Preload: 179 kgf

S.F: 0.15~1.85 (kgf)

DRAG TORQUE: 0.30~3.70 (kgf-cm)

DYNAMIC: 277 (kgf)

STATIC: 492 (kgf)

SPEC: R12-5.08B1-FSW

MAX. AXIAL LOAD (kgf)		LUBRCATION		PRELOAD (kgf)	-
MAX. ROTATIONAL SPEED (rpm)		SPACE BALL		R.D	-
DN VALUE		E1 TYPE ASSEMBLY METHOD		S.F (kgf)	———
MAX. FEED RATE (m/min)		CUSTOMER DRAWING NO.		DRAG TORQUE (kgf-cm)	———
ACCELERATION (m/sec^2)		CUSTOMER MC TYPE		DIRECTION OF TURN	R
SUPPORT METHOD		CUSTOMER AXIAL TYPE		PC DIA.	12.3
				BALL DIA.	2
				BACKLASH	-
				CIRCUIT	2.5*1
				LEAD ANGLE	7.49
				DYNAMIC (kgf)	-
				STATIC (kgf)	-
				LEAD / PITCH	5.08/2.54

THREAD LENGTH

E300: -

UNCHAMFERED USE ■R0.5 □R1 □R

ROUGH M/C	FIN M/C	GRD	SCALE
25a	6.3a	0.4a	1: X

UNTOL DIMN mm

UP TO 6	6 30	30 120	120 300	300 600	600 1200	1200 2400	OVER 2400
±0.1	±0.2	±0.3	±0.4	±0.5	±0.8	±1.0	±1.5

MATAL	SH: Rolled	DATE	05.05.'04
	NT: SNCM220	DWG	???
THREAD BALL TRACK HRC 56 ~~ 62		APPD	???
		PROCESS NO.	G
CUSTR	H-CHICAGO		
DWG.NO.	A10SKHA2		

HIWIN® BALLSCREWS

*BREAK SHARP EDGE UNLESS OTHER SPECIFIED.
*??????R0.5MAX

THREAD END ALLOWS ABOVE LENGTH OUT OF HARDNESS TOLERANCE

DATE	MODIFICATION	APPROVED
05.05.'04	MOD. ⚠1	???

* PLEASE IGNORE CHINESE CHARACTERS WHICH ARE FOR OUR REFERENCE ONLY.