列印者:00018028 張家瑜 列印時間:2018/06/28 18:36:08
機密級 More Confidential

A1AA2SA2 | More Confidential

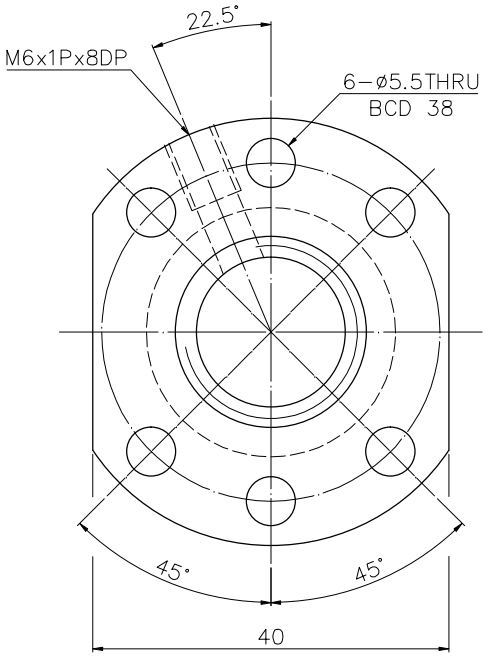

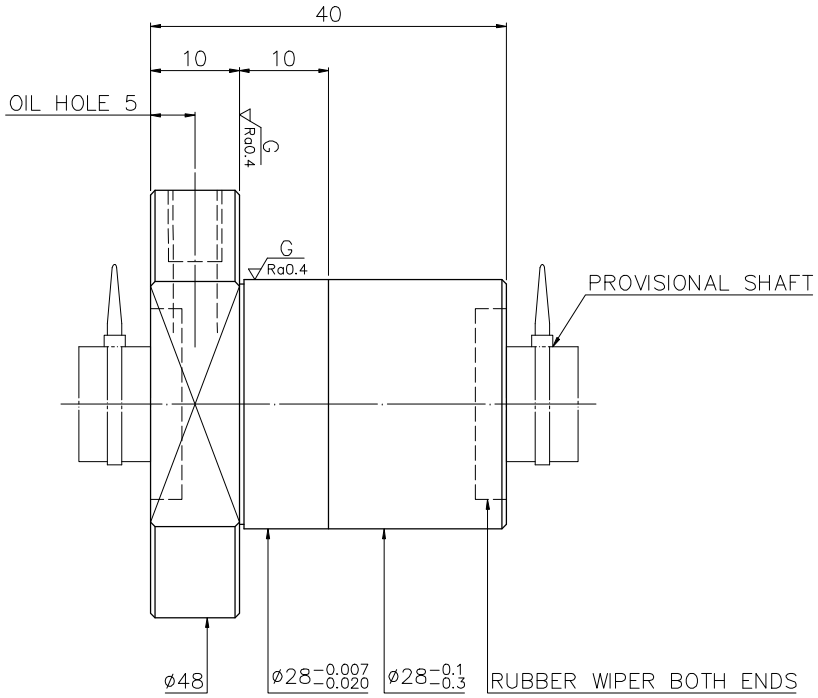

SPEC: R16-5T3-FSIFW

MAX. AXIAL LOAD (kgf)		LUBRICATION		PRELOAD (kgf)	~
MAX. ROTATIONAL SPEED (rpm)		SPACE BALL		R.D.	~
DN VALUE		E1 TYPE ASSEMBLY METHOD		S.F. (kgf)	~
MAX. FEED RATE (m/min)		CUSTOMER DRAWING NO.		DRAG TORQUE (kgf-cm)	~
ACCELERATION (m/sec²)		CUSTOMER MC TYPE		DIRECTION OF TURN	R
SUPPORT METHOD		CUSTOMER AXIAL TYPE		P.C. DIA.	16.175
				BALL DIA.	3.175
				BACKLASH	0.03MAX
				CIRCUIT	3
				LEAD ANGLE	5.62
				DYNAMIC (kgf)	664
				STATIC (kgf)	1195
				LEAD	5

THREAD LENGTH

UNCHAMFERED USE ■C0.5 □C1 □C

ROUGH M/C	FIN M/C	GRD
Ra25	Ra6.3	Ra0.4

SCALE 1:X

NORMAL TOLERANCE mm

UP TO 6	6 30	30 120	120 300	300 600	600 1200	1200 2400	OVER 2400
±0.1	±0.2	±0.3	±0.4	±0.5	±0.8	±1.0	±1.5

MAT. SH:ROLLED / NT:S55C/Equivalent

THREAD BALL TRACK HRC 56 ~ 62

DATE	2018.05.18
DWG	Yolin
CHK	Shower
APPD	Kelly
CUSTR	H-CHICAGO
DWG.NO.	A1AA2SA2

HIWIN BALLSCREWS

*BREAK SHARP EDGE UNLESS OTHER SPECIFIED.
*未畫倒角者去毛邊 (C0.2MAX)

THREAD END ALLOWS ABOVE LENGTH OUT OF HARDNESS TOLERANCE

V300p: ~
ep: ~

DATE	MODIFICATION	APPROVED
2018.05.18	MOD. 1	Kelly

* PLEASE IGNORE CHINESE CHARACTERS WHICH ARE FOR OUR REFERENCE ONLY.

機密級 More Confidential
列印者:00018028 張家瑜 列印時間:2018/06/28 18:36:08
A1AA2SA2-20180518170844